

MODEL INSTRUCTION



Stainless steel
impeller



Stainless steel
oil cylinder





NSK Bearing



DC controller

3 D S C 4.5– 35– 24– 300

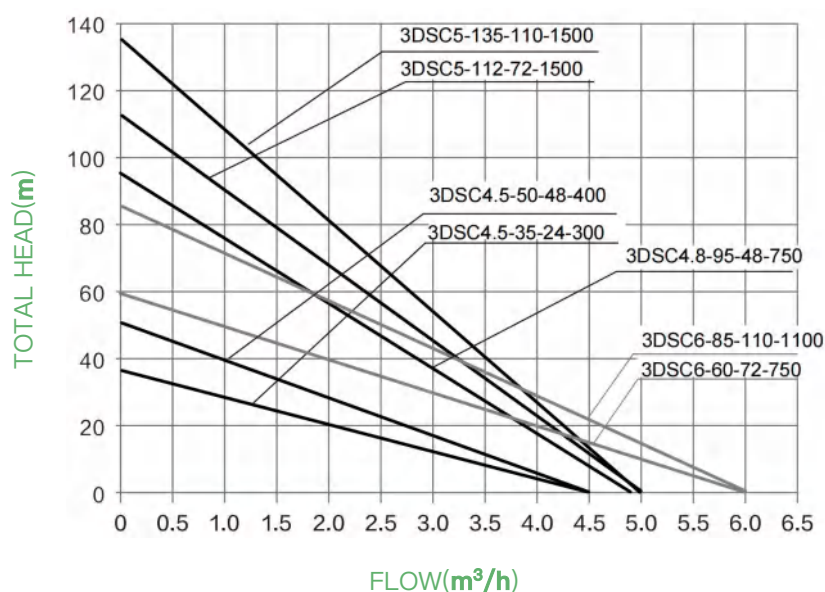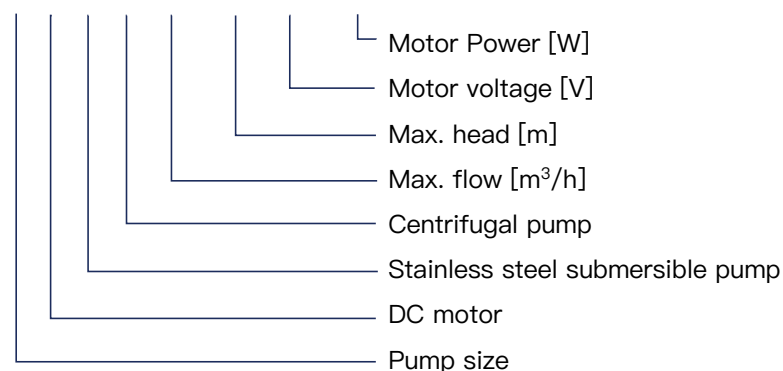

TECHNICAL DATA:

ITEM	Voltage	Optimum input voltage(DC)	Power	Max. Flow (m³/h)	Max. Head (m)	Outlet	Cable	Solar panel (≥1.3*PUMP POWER)
								Open circuit voltage
3DSC4.5-35-24-300	24V	30V-48V	300W	4.5	35	1.25"	2m	<60V
3DSC4.5-50-48-400	48V	60V-90V	400W	4.5	50	1.25"	2m	<110V
3DSC4.8-95-48-750	48V	60V-90V	750W	4.8	95	1.25"	2m	<110V
3DSC5-112-72-1100	72V	90V-120V	1100W	5	112	1.25"	2m	<170V
3DSC5-135-110-1500	110V	110V-150V	1500W	5	135	1.25"	2m	<220V
3DSC6-60-72-750	72V	90V-120V	750W	6	60	1.25"	2m	<170V
3DSC6-85-110-1100	110V	110V-150V	1100W	6	85	1.25"	2m	<220V