



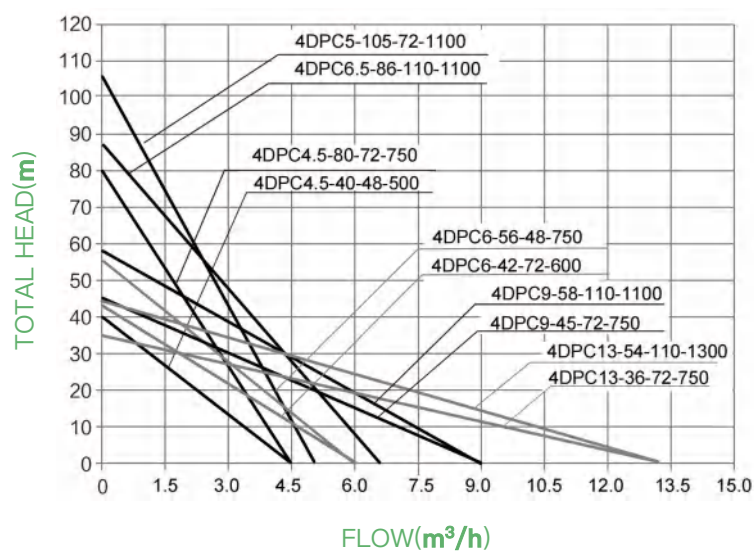

MODEL INSTRUCTION

4 D P C 4.5- 40- 48- 500

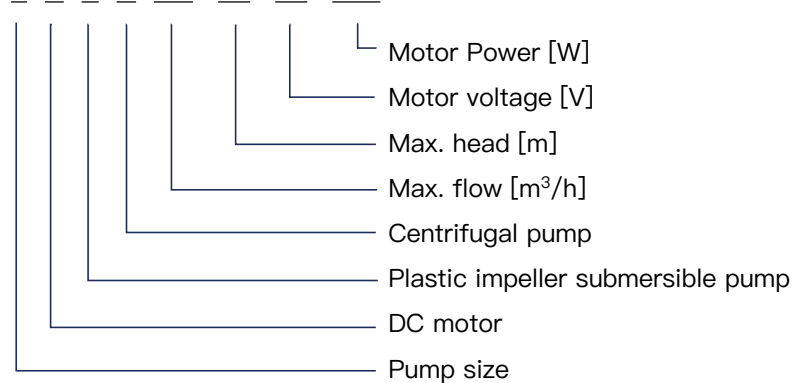

TECHNICAL DATA:

ITEM	Voltage	Optimum input voltage(DC)	Power	Max. Flow (m ³ /h)	Max. Head (m)	Outlet	Cable	Solar panel (≥1.3*PUMP POWER)
								Open circuit voltage
4DPC4.5-40-48-500	48V	60V-90V	500W	4.5	40	1.25"	2m	<110V
4DPC4.5-80-72-750	72V	90V-120V	750W	4.5	80	1.25"	2m	<170V
4DPC5-105-72-1100	72V	90V-120V	1100W	5	105	1.25"	2m	<170V
4DPC6-56-48-750	48V	60V-90V	750W	6	56	1.25"	2m	<110V
4DPC6-42-72-600	72V	90V-120V	600W	6	42	1.25"	2m	<170V
4DPC6.5-86-110-1100	110V	110V-150V	1100W	6.5	86	1.25"	2m	<220V
4DPC9-45-72-750	72V	90V-120V	750W	9	45	2"	2m	<170V
4DPC9-58-110-1100	110V	110V-150V	1100W	9	58	2"	2m	<220V
4DPC13-36-72-750	72V	90V-120V	750W	13	36	2"	2m	<170V
4DPC13-54-110-1300	110V	110V-150V	1300W	13	54	2"	2m	<220V