



Stainless steel
impeller



Stainless steel
oil cylinder






NSK Bearing



DC controller

MODEL INSTRUCTION

4 D S C 3.5- 50- 48- 400

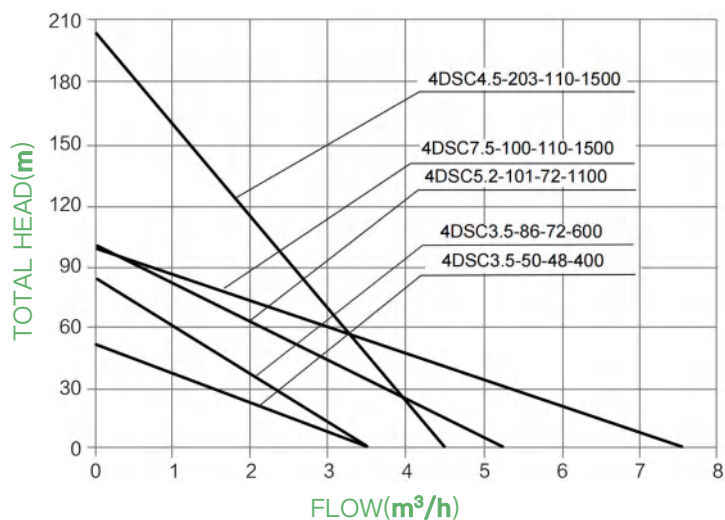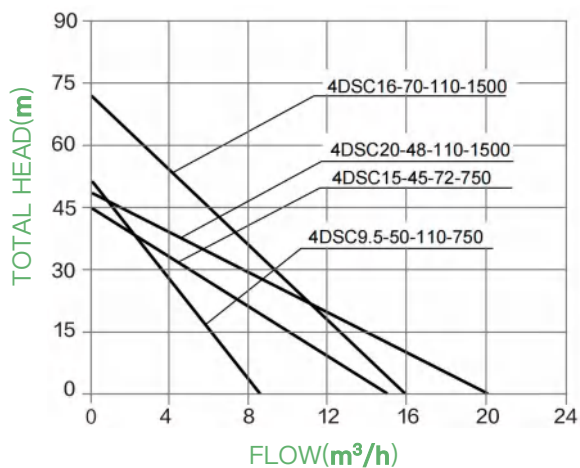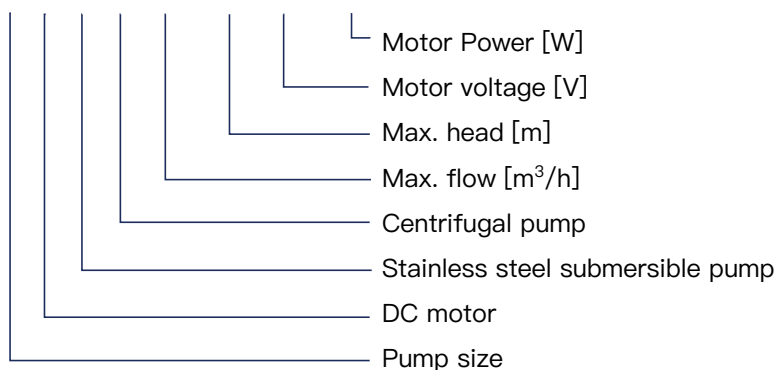

TECHNICAL DATA:

ITEM	Voltage	Optimum input voltage(DC)	Power	Max. Flow (m³/h)	Max. Head (m)	Outlet	Cable	Solar panel (≥1.3*PUMP POWER)
								Open circuit voltage
4DSC3.5-50-48-400	48V	60V-90V	400W	3.5	50	1.25"	2m	<110V
4DSC3.5-86-72-600	72V	90V-120V	600W	3.5	86	1.25"	2m	<170V
4DSC4.5-203-110-1500	110V	110V-150V	1500W	4.5	203	1.25"	2m	<220V
4DSC5.2-101-72-1100	72V	90V-120V	1100W	5.2	101	1.25"	2m	<170V
4DSC7.5-100-110-1500	110V	110V-150V	1500W	7.5	110	1.25"	2m	<220V
4DSC9.5-50-110-750	110V	110V-150V	750W	9.5	50	2"	2m	<170V
4DSC15-45-72-750	72V	90V-120V	750W	15	45	2"	2m	<170V
4DSC16-70-110-1500	110V	110V-150V	1500W	16	70	2"	2m	<220V
4DSC20-48-110-1500	110V	110V-150V	1500W	20	48	2"	2m	<220V